




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification³ : A47C 7/02	A1	(11) International Publication Number: WO 85/ 00006 (43) International Publication Date: 3 January 1985 (03.01.85)
(21) International Application Number: PCT/GB84/00215 (22) International Filing Date: 18 June 1984 (18.06.84) (31) Priority Application Number: 8316651 (32) Priority Date: 18 June 1983 (18.06.83) (33) Priority Country: GB (71)(72) Applicant and Inventor: BOARDMAN, Paul, Andrew [GB/GB]: 16 Woodman's Way, Bishops Cleeve, Cheltenham GL52 4DP (GB). (74) Agent: J. M. HEPWORTH & CO.; Furnival House, 14/18 High Holborn, London WC1V 6DE (GB). (81) Designated States: AT (European patent), AU, BE (European patent), CH (European patent), DE (European patent), DK, FI, FR (European patent), GB (European patent), JP, LU (European patent), NL (European patent), NO, SE (European patent), US.		Published <i>With international search report.</i>
(54) Title: ARMCHAIR WITH TILTABLE SEAT (57) Abstract <p>An armchair (10) having a seat (16) tiltable relative to a fixed frame (12, 14, 18) of the chair to provide aid to an occupant in rising from the chair, the seat being tiltable from a lowered position to a raised position by a lever mechanism (24) provided beneath the seat, characterised in that the lever mechanism is operatively connected to at least one pivotal arm assembly (20, 22) of the chair and is actuated by downward movement of that arm by force exerted thereon by the occupant in rising from the chair.</p>		

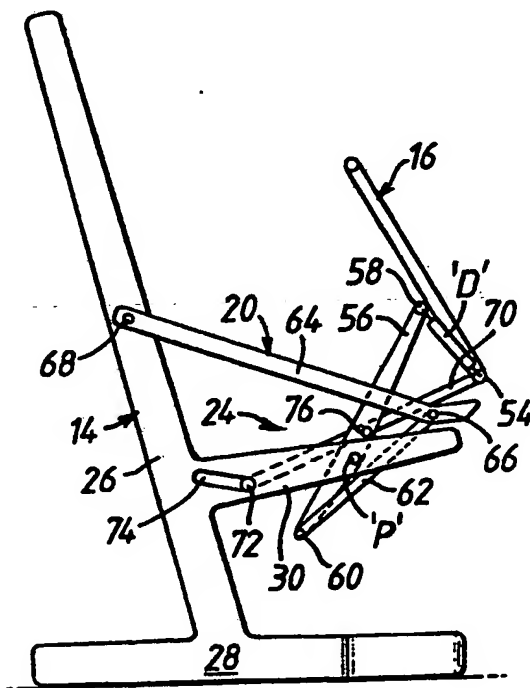

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	KR	Republic of Korea
AU	Australia	LI	Liechtenstein
BE	Belgium	LK	Sri Lanka
BG	Bulgaria	LU	Luxembourg
BR	Brazil	MC	Monaco
CF	Central African Republic	MG	Madagascar
CG	Congo	MR	Mauritania
CH	Switzerland	MW	Malawi
CM	Cameroon	NL	Netherlands
DE	Germany, Federal Republic of	NO	Norway
DK	Denmark	RO	Romania
FI	Finland	SD	Sudan
FR	France	SE	Sweden
GA	Gabon	SN	Senegal
GB	United Kingdom	SU	Soviet Union
HU	Hungary	TD	Chad
JP	Japan	TG	Togo
KP	Democratic People's Republic of Korea	US	United States of America

-1-

ARMCHAIR WITH TILTABLE SEATTECHNICAL FIELD

This invention relates to an armchair having a tiltable seat to provide aid to an occupant in rising from the seat.

BACKGROUND ART

5 Chairs having tiltable seats are known in the art. For example, a chair having a seat in which the tilting movement is actuated by spring-loading designed specifically for a particular user is known. It is also known to provide a chair with a tiltable seat in which the tilting
10 movement is pneumatically or electrically controlled. However, these seats tend to be expensive, bulky and difficult to operate by infirm or elderly persons.

DISCLOSURE OF THE INVENTION

15 The present invention seeks to overcome the disadvantages of prior constructions by providing a chair with a tiltable seat which is actuated by a relatively simple mechanism and which utilizes the normal force which an occupant exerts in rising from the seat.

20 To this end, the invention provides an armchair having a seat tiltable relative to a fixed frame of the chair to provide aid to an occupant in rising from the chair, the seat being tiltable from a lowered position to a raised
25 position by a lever mechanism provided beneath the seat,



-2-

characterised in that the lever mechanism is operatively connected to at least one pivotal arm assembly of the chair and is actuated by downward movement of that arm by force exerted thereon by the occupant in rising from the chair.

5

An embodiment of the invention will now be described, by way of example, with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

10

FIGURE 1 is a perspective view of an armchair according to the invention;

FIGURE 1A is an exploded view of the main structural components of the chair;

15

FIGURE 2 is a side view of one side frame member of the chair showing the seat in a tilted and raised position;

20

FIGURE 3 is a side view similar to FIGURE 2 but showing the seat in a lowered position as normally occupied.

25

FIGURE 4 is a part-sectional perspective view of a pivotal arm assembly incorporating locking means by which the tilting mechanism is held locked relative to the fixed frame of the chair;

FIGURE 5 is a detailed cross-sectional view of the locking means shown in locked condition; and

30

FIGURE 6 is a view similar to FIGURE 5 but showing the locking means in a released condition.



-3-

BEST MODE FOR CARRYING OUT THE INVENTION

Referring to the drawings, the armchair 10 is of modular construction of which the main structural components comprise a pair of similar side frames 12, 14 respectively, interconnected and spaced apart by a tiltable seat pan 16 and a back frame 18, and a pair of pivotal arm assemblies 20, 22 respectively, each of which actuates a seat tilting mechanism such as mechanism 24.

Side frame 14 comprises a main upright strut 26, a foot 28 integral with upright strut 26 and a forwardly projecting support member 30 also integral with the upright strut intermediate its ends. Side frame 12 is of similar construction.

The back frame 18 is a simple rectangular frame comprising longitudinal and transverse frame elements 32, 34 and 36, 38 respectively. The longitudinal frame elements are formed with fastening locations 'l' at which the side frames are connected to the back frame by suitable fasteners at fixing locations 'f'. The transverse frame element 38 is displaced forwardly of the plane containing the other frame elements and thereby provides a step 's' on which the rear-most part of the seat pan is supported when the seat is in its lowered (substantially horizontal) position. The back frame is in-filled by a suitable material, which may be attached to the longitudinal frame elements as shown in order to provide the chair back 40.

The seat pan 16 also comprises a generally rectangular frame comprising longitudinal and transverse frame elements 42, 44 and 46, 48, respectively. The forward transverse frame element 48 is displaced rearwardly and below the longitudinal frame elements so that the frame in-fill material 50 is wrapped over the leading edge of the seat to aid comfort of the user. The forward end of each of the longitudinal frame elements is furnished with a journal bush 52 and 54, respectively, by which the leading edge of

-4-

of the seat is pivotally connected to the tilting mechanism 24.

5 The seat tilting mechanism will now be described with reference to mechanism 24 associated with side frame 14, it being understood that a similar mechanism is associated with the other side frame 12.

10 Mechanism 24 comprises a main tilting lever 56 which is pivotally mounted at 'P' intermediate its ends to support member 30 of side frame 14. One end of lever 56 carries a stub shaft 58 which engages beneath seat pan longitudinal frame element 44.

15 The stub shaft 58 may be replaced by a rod which connects together the main lifting levers of both tilting mechanisms and which extends across the seat pan 16. The opposite end of main tilting lever 56 is pivotally mounted at 60 to the lower end of a connecting strut 62 of pivotal arm assembly 20 22. The upper end of strut 62 is hinged to the forward end of pivotal arm 64 of the assembly 22 by means of a hinged connection 66. The rearward end of pivotal arm 64 is pivotally mounted to the side frame 14 by pivotal connection 68.

25 In order to provide simultaneous lifting and forward movement of the seat pan 16, a main lifting lever 70 has one of its ends pivotally journalled to the leading edge of the seat frame by means of a pivotal connection to journal 30 bush 54 and has its opposite end pivotally and slidably mounted to the support member 30 adjacent upright strut 26 by means of pivot 72 mounted within slider 74. The main lifting lever 70 is interconnected with the main tilting lever 56 intermediate their ends by means of pivotal 35 connection 76.

The seat tilting mechanism 24 is actuated by pivotal movement of the arm assembly 22 as will now be described.



-5-

5 The connecting strut 62 of the arm assembly 22 is of hollow construction and houses a reciprocal actuator push rod 78 which slides in a through bore 80 of the strut 62. The upper end of push rod 78 abuts the undersurface of an actuating button 82 within button recess 84. The lower end of the push rod is formed to provide an inclined face 86 which cooperates with detent 88 having a cunieform recess 90 in its mid-section. Detent 88 is slidably accommodated within a blind bore 92 extending transversely of the strut adjacent its lower end. The detent has a locking nose portion 94 which normally protrudes proud of the mouth of blind bore 92 and engages in a recessed step 96 provided at the forward end of support member 30 thereby to hold the pivotal arm assembly locked to the support member against pivotal movement.

20 In order to release strut 62 to permit pivotal movement of the arm assembly 22 the push rod is caused to move downwardly whereby the inclined surface 86 acts on the oppositely inclined surface 98 of the detent mid-section and forced the detent to slide inwardly of blind recess 92 against the force of compression spring 100. Thus, the nose portion 94 is retracted out of engagement with the recess step 96 to unlock the pivotal arm assembly.

25 The actuating button extends through an aperture 102 provided at the forward end of pivotal arm 64 so that an exposed portion of the button stands proud of the pivotal arm 64 and is depressed to cause a downward movement of the push rod.

30 The lower end of strut 62 is formed with a stepped portion 104 which seats in an oppositely stepped portion provided in the lower forward end of support member 30 when the arm assembly is in its locked condition.

35 The other arm assembly 20 is similarly constructed.



-6-

When both arm assemblies are in their locked positions, the pivotal arms thereof are in a substantially horizontal position and the connecting struts are in an upright position as shown in solid lines in FIGURE 2. Moreover, in this condition the seat pan 16 is in its lowered position i.e substantially horizontal and the main levers of the tilting mechanism 56 and 70 are in folded condition adjacent the inner faces of the support members of their respective side frames. Hence, the chair may be used as a normal arm chair.

In order to benefit from the aid a user derives in rising from the chair by the tiltable seat, the occupant first depresses the actuating buttons of each arm assembly simultaneously so as to unlock those assemblies. The occupant thereafter actuates the seat tilting mechanism by pushing downwardly on the forward ends of the pivotal arms during rising and also shifts forwardly in the seat. This is a quite natural movement normally affected in rising from an armchair.

However, in the chair according to this invention, such rising movement by the occupant operates the tilting mechanism again referred to in relation to mechanism 24. As the pivotal arm 64 moves downwardly about pivot 68, connecting strut 62 pivots anti-clockwise about hinge 66 thereby causing the main tilting lever 56 to rotate clockwise about pivots 60 and 'P'. Thus, stub shaft 58 pushes upwardly against the seat frame and in so doing executes a relative sliding movement with respect thereto travelling forwardly of the seat frame. Thus, the seat is caused to pivot about its journalled forward end e.g journal bush 54 in a clockwise direction whereby the rear of the seat frame is raised relative to its front end.

Since levers 56 and 70 are interconnected, clockwise rotation of lever 56 also causes pivot 76 to shift relative to fixed pivot 'P' and thus the pivotal movement of lever

-7-

56 is accompanied by a generally forward sliding movement of pivot 72 relative to slider 74 during anti-clockwise rotation of lever 70 about pivot 72. Thus, the leading edge of the seat simultaneously is raised and moved forwardly relative to the support member 30. Hence, the scissor-like assembly of levers 56 and 70 is 'opened' when the seat is in its raised and tilted condition.

When the occupant returns to the chair and sits upon the seat, the occupants body-weight causes the seat to be lowered thus 'closing' the scissor-like mechanism to its initial position. The connecting strut detents automatically lock into the support members due to their spring loaded bias and due to the ramp surface provided at the tip of the detent nose portion.

As shown in FIGURE 1 the feet of the side frames have divergent forward facing portions to provide a stable base for the chair. Further, this arrangement allows a user having a walking aid to approach the chair more easily.

In order to allow the seat to return gradually to its lowered position a one-way damping device 'D', which may be a pneumatic piston and cylinder device is interconnected between pivot 54 and 58 thereby to return lowering movement of the seat. It is to be understood that the relative ratios of the lever sizes and their pivotal locations can be adjusted to provide different tilt angles of the seat and to vary the height to which the seat is raised. For example, where the damping device 'D' is a pneumatic piston and cylinder device the angle of inclination of the raised seat is arranged to be less acute so that end 58 of the main tilting lever travels a smaller distance relative to the seat frame.



-8-

CLAIMS

1. An armchair having a seat tiltable relative to a fixed frame of the chair to provide aid to an occupant in rising from the chair, the seat being tiltable from a lowered position to a raised position by a lever mechanism provided beneath the seat, characterised in that the lever mechanism is operatively connected to at least one pivotal arm assembly of the chair and is actuated by downward movement of that arm by force exerted thereon by the occupant in rising from the chair.
2. An armchair according to claim 1, further characterised in that the lever mechanism causes the rear of the seat to tilt forwardly relative to a forward part of the seat and simultaneously raises and moves the seat forwardly relative to the fixed frame.
3. An armchair according to claim 1 or claim 2 further characterised in that the fixed frame of the seat comprises a cantilevered support element about which the lever mechanism is pivotal and in that locking means is provided to lock said pivotal arm assembly relative to the support element and thereby arrest movement of the lever mechanism when the chair is in use.



4. An armchair according to claim 3, further characterised in that the pivotal arm assembly comprises a pivotal arm pivotally mounted to a part of the fixed frame above said cantilevered support element and a connecting strut having one end pivotally connected to the pivotal arm remote from its pivotal mounting and an opposite end connected to one end of a main tilting lever of the lever mechanism said opposite end of the arm also incorporating the locking means by which the pivotal arm assembly is locked relative to the fixed frame.

5. An armchair according to claim 4, further characterised in that said main tilting lever is pivotally mounted intermediate its ends to said cantilever support member and has an opposite end located for abutment with the chair seat such as to tilt a rear part of the seat relative to a forward end thereof during rotation of the main tilting lever with respect to said cantilevered support member.

6. An armchair according to claim 5, further characterised in that a main lifting lever pivotally is connected to said main tilting lever intermediate the ends of those levers to form a scissor-like assembly, in that one end of the main lifting lever pivotally is mounted to a forward part of the seat and in that the opposite end of the main lifting lever is pivotally and slidably mounted to said cantilevered support member rearwardly of the pivotal connection between the main tilting lever and the cantilevered support member.

7. An armchair according to any of claims 4 to 6, further characterised in that the locking means comprises a detent housed in said connecting strut of the pivotal arm assembly which detent engages a forward end of said cantilevered support element and in that the detent is movable out of locking engagement with said cantilevered support element by a reciprocal rod movable by an actuating button provided at the forward end of the pivotal arm of the arm assembly.




-10-

8. An armchair according to claim 7, further characterised in that the detent is resiliently biased automatically to lock the pivotal arm assembly when the seat is returned to its lowered position.




1/5

FIG.1

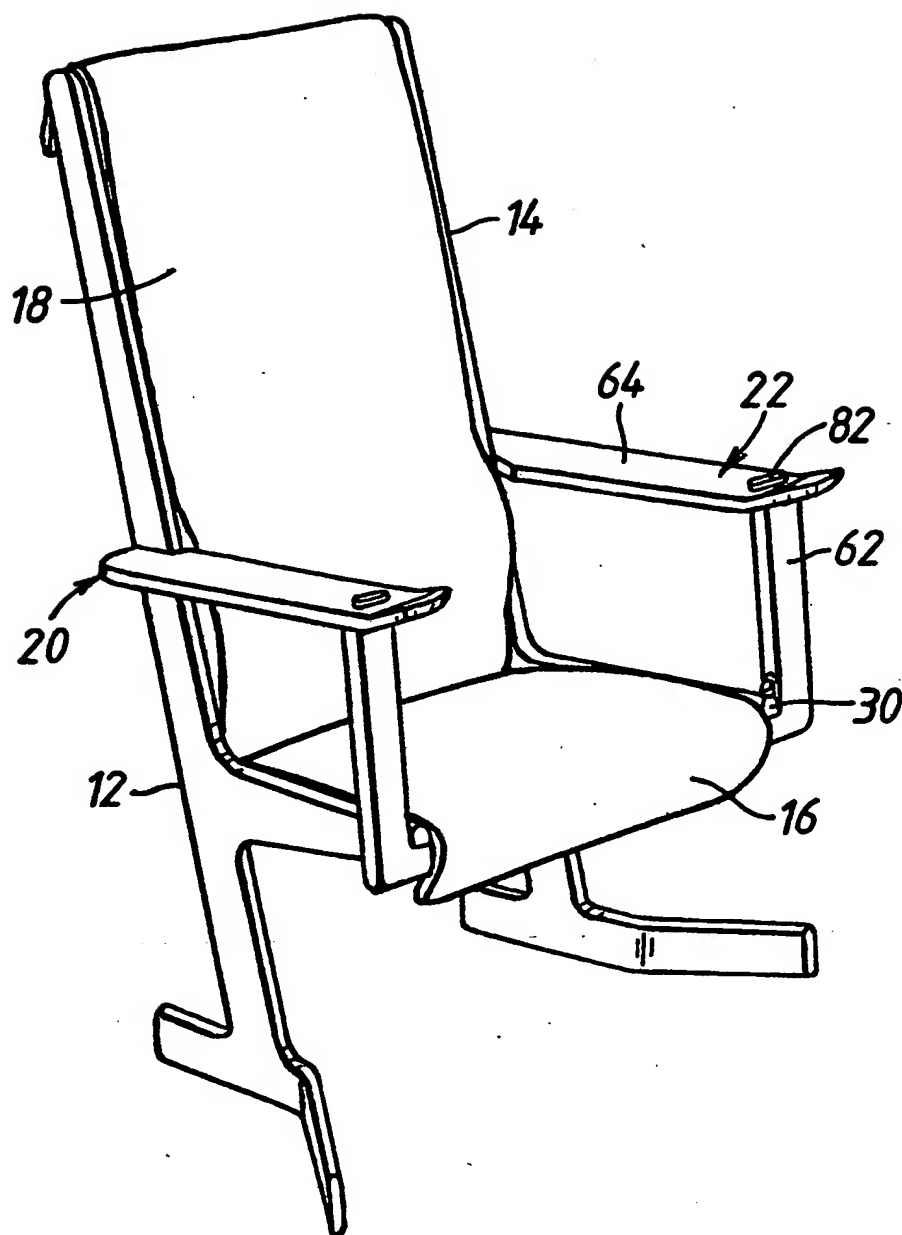

2/5

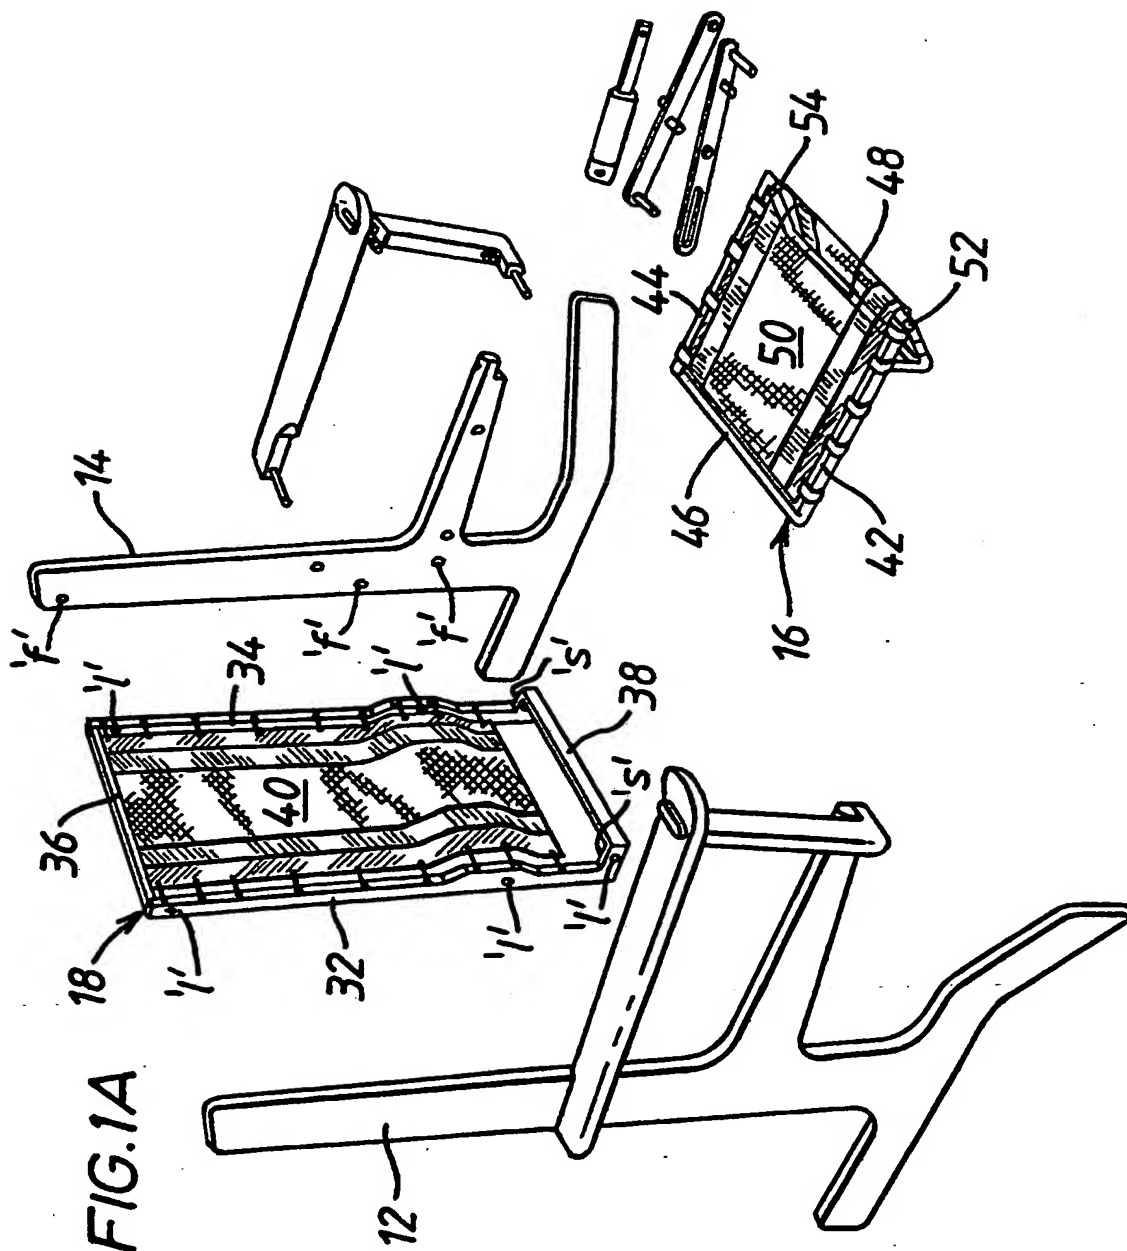

SUBSTITUTE SHEET



FIG. 2



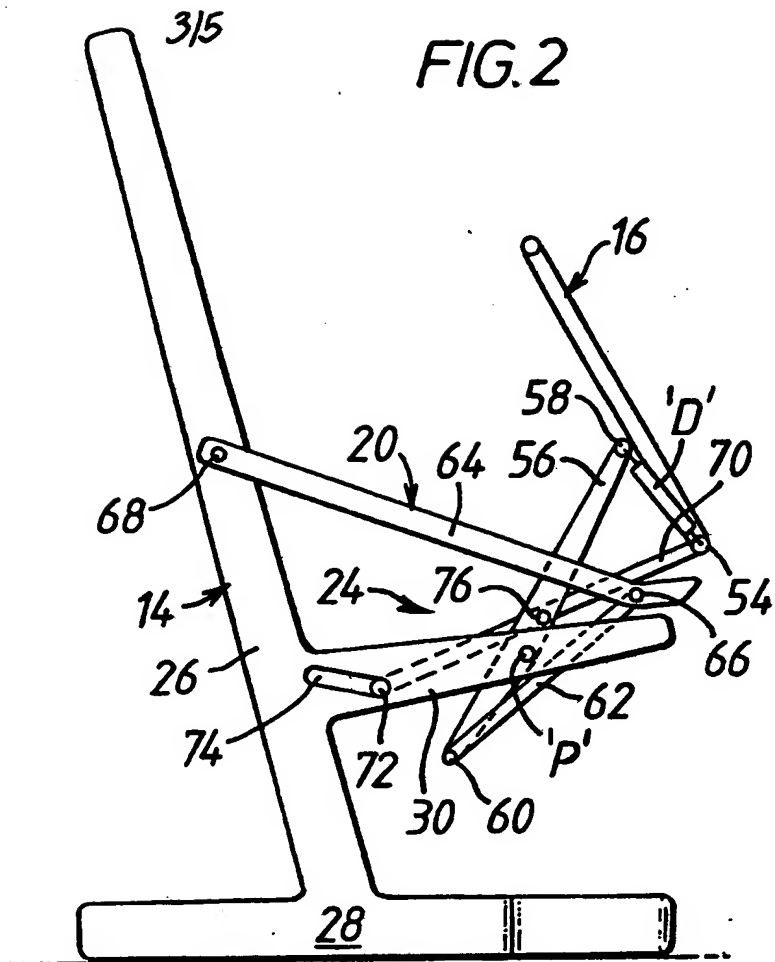


FIG. 3


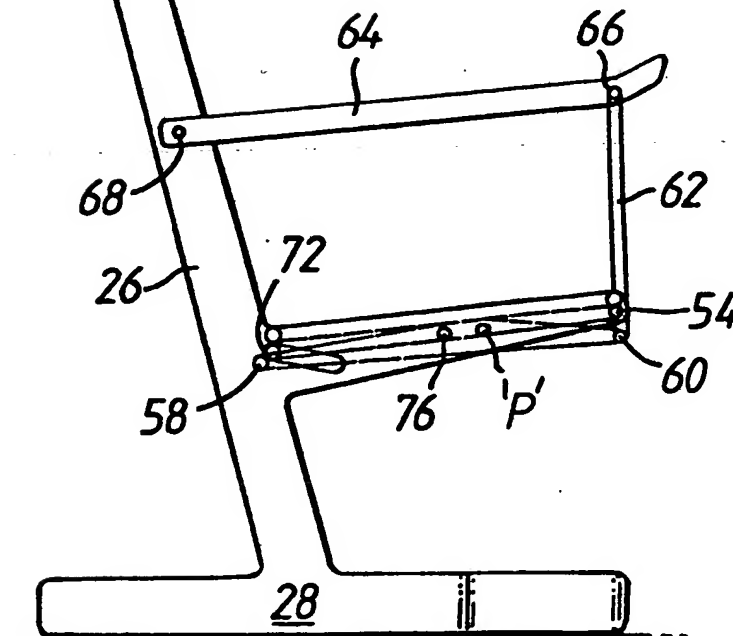


4/5

FIG. 4

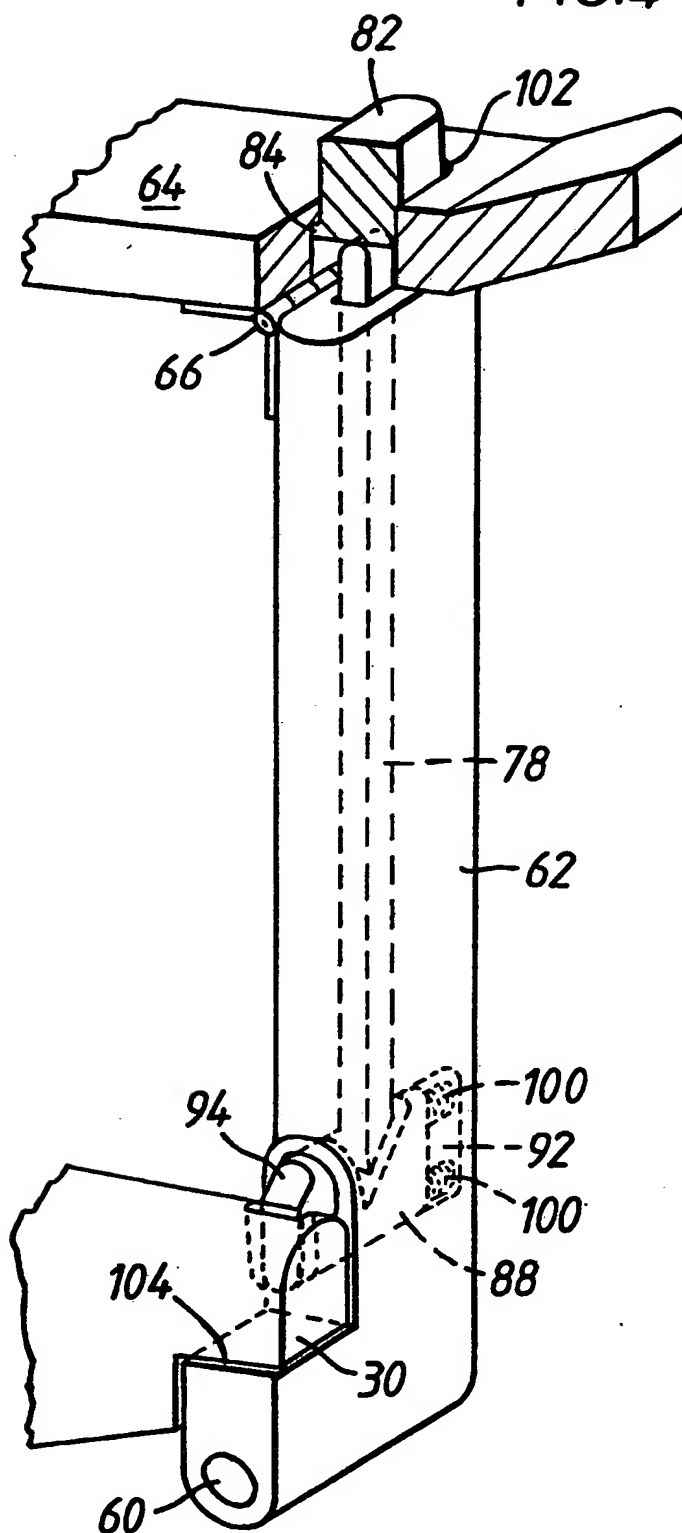

5/5

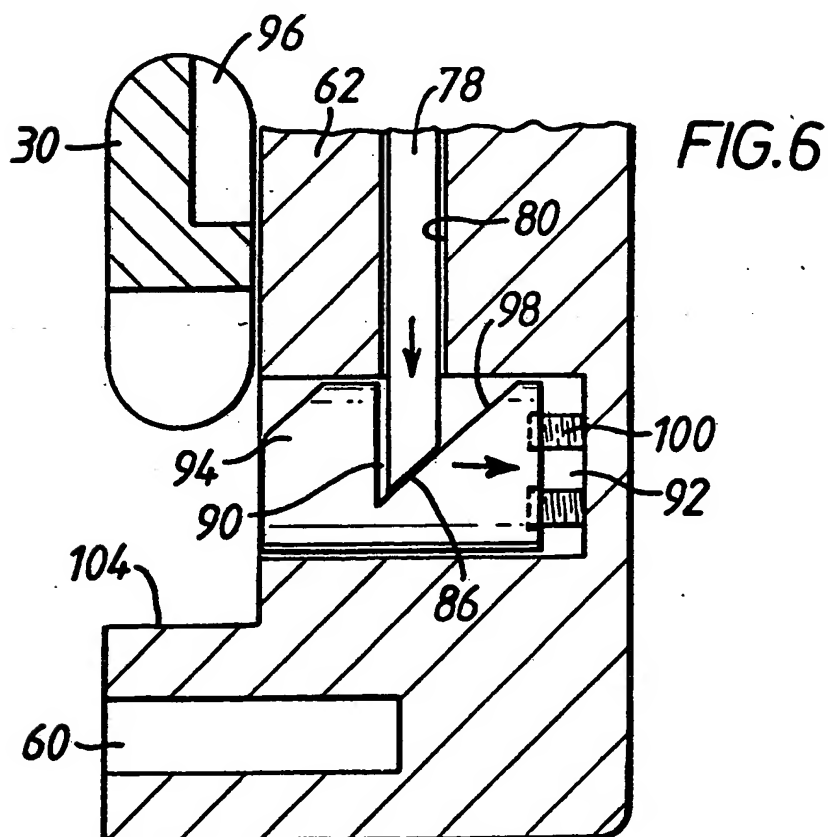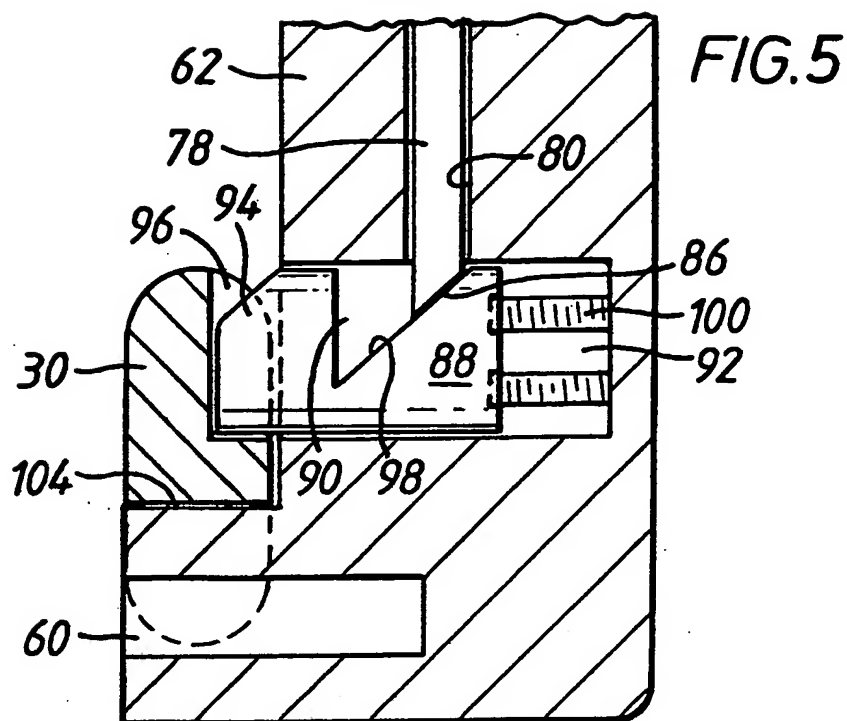

INTERNATIONAL SEARCH REPORT

International Application No PCT/GB 84/00215

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) *		
According to International Patent Classification (IPC) or to both National Classification and IPC		
IPC ³ : A 47 C 7/02		
II. FIELDS SEARCHED		
Minimum Documentation Searched *		
Classification System	Classification Symbols	
IPC ³	A 47 C; A 61 G	
Documentation Searched other than Minimum Documentation to the extent that such Documents are Included in the Fields Searched *		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴		
Category *	Citation of Document, ¹⁵ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸
P,A	FR, A, 2529456 (FRALCH) 6 January 1984, see claims 1,7; figures	1
A	US, A, 3259427 (WIEST) 5 July 1966, see the entire document	1

<p>* Special categories of cited documents: ¹⁴</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"A" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search *		Date of Mailing of this International Search Report *
25th September 1984		12 OCT. 1984
International Searching Authority *		Signature of Authorized Officer ²⁰
EUROPEAN PATENT OFFICE		G.L.M. Kruidenberg

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON

INTERNATIONAL APPLICATION NO. PCT/GB 84/00215 (SA 7433)

This Annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 05/10/84

The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR-A- 2529456	06/01/84	None	
US-A- 3259427		None	

For more details about this annex :
see Official Journal of the European Patent Office, No. 12/82